


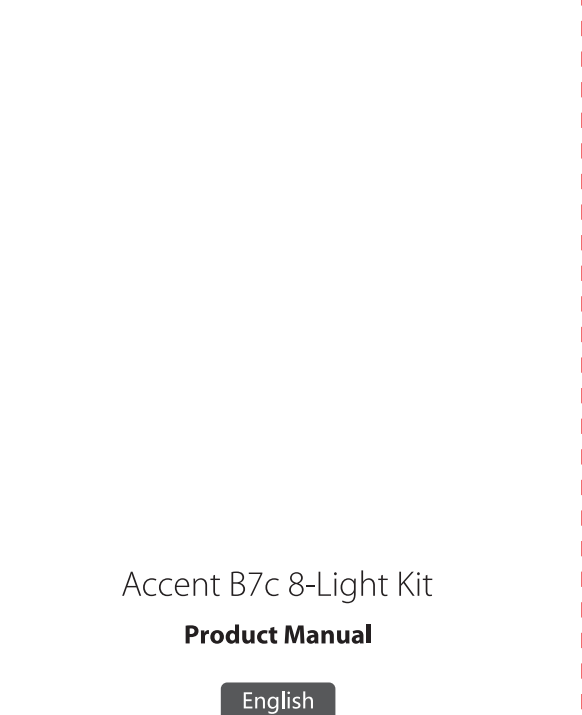

Function/Mode	Trigger	Light Pattern
Bluetooth Reset	Simultaneously long-press the power button and the "+" or "-" button for 5 seconds.	The light will flash Red, Green then Blue.
Charging in Progress	When the bulb is in standby mode or is powered off, press the "+" or "-" buttons.	The light will output 3200K at 10% brightness, pulsing three times.
Fully Charged	When the bulb is in standby mode or is powered off, press the "+" or "-" buttons.	The light will output 3200K at 10% brightness for three seconds.
Switch to Standard (AC) Mode	Simultaneously press the power button, the "+" button, and the "-" button.	The light will emit green at 30% output, then gradually dim to 0%.
Switch to Battery (DC) Mode	Simultaneously press the power button, the "+" button, and the "-" button.	The light gradually fades into a green glow from 0% to 30% brightness.
Checking AC Mode	When not connected to AC power, to confirm that the light is in AC mode, long-press the power button for 3 seconds.	The light will pulse green at 10% brightness 3 times.
Checking the Battery Charge Level	You can check the B7c charge level in any mode. To perform a check, simultaneously press the "+" and "-" buttons.	The bulb will pulse with blue light, with the number of pulses corresponding to its charge level. 1 Pulse = 0-20% 2 Pulses = 20-40% 3 Pulses = 40-60% 4 Pulses = 60-80% 5 Pulses = 80-100%

CCT	2,000K-10,000K
CRI	95+ (2,500K-10,000K)
TLCI	96+ (2,500K-10,000K)
CQS	95+ (ave. 2,500K-10,000K)
SSI (Tungsten)	85
SSI (D55)	74
Lumens	570
Lamp Socket Type	E26/E27
Control Methods	On-board Controls, Sidus Link App

Power Input	100V~240V AC
Power Cable Type	IEC AC Power Cable
Power Cable Length	1.2m
Max Power Draw	≤100W
Socket Connector	E27
Fuse Type	3A
IP Rating	N/A
Cooling Method	Passive
Dimensions	35.8"×28.4"×16.7cm / 14.09"×11.2"×6.59in
Weight (Empty)	3304g / 7.28lbs
Weight (Full)	5200g / 11.46lbs

Detailed product manual can be found on www.aputure.com

GUARANTEE CARD

Serial No.	
Item Name	
Purchase Date	
Buyer Name	
Buyer Phone	
Buyer Add	
Franchiser Seal	

Apiture Imaging Industries Co., Ltd.

Inspection: Qualified

And T73, Building 21, Luoyang Industrial Estate, Hengyue Road, Shougang, Guangzhou

Apurture Imaging Industries Co., Ltd. warrants the original consumer purchasers of the Apurture Imaging Industries Co., Ltd. products, for a period of one (1) year after the date of purchase, for normal uses of warranty, see www.apurture.com.

Important: The original sales receipt, bearing the dealer's name, location and the date of purchase, is part of the product. This information is required for warranty service.


Warranty does not cover:

- Damage that is the result of misuse, abuse, accident (including but not limited to damage by water, faulty connection, defective use of the product or equipment) or other causes that are not intended.
- Consumer devices that appear more than thirty (30) days after the date of purchase. Consumer damage caused by improper handling (including but not limited to damage caused by dropping or mishandling) will survive it.

This warranty is void if:

- The product identification or serial No. label is removed or defaced in any way.
- any warranty is requested or required by one other than Apurture or an authorized Apurture dealer or service agency.

Apurture Imaging Industries Co., Ltd.
Address: 10/F, Building 1, No. 10, Heping West Road, Shenzhen, Guangdong
E-MAIL: cs@apurture.com
Sales Contact: (86)0755-83285694/13



为折线(不印刷)

折页成型（英文在正面）：

 Aperture 深圳市爱图仕影像器材有限公司			
设计项目	213 说明书-修改内容	图号	AP-213-PR-02
尺寸 (mm)	560*240mm 折页尺寸: 80*120mm	版本	V1.0
材质工艺	70g 书纸, 正反两面印刷	设计师	Tina
		日期	20210108
备注	料号: 521300040001		

